

# TMP Distribution Manifold

Multiple connections that allow flow distribution, saving accessories, space and cost. The standard model has a main inlet/outlet connection and multiple side ports. The distance between the side ports connections is optimized to allow the installation of elbows, gauge of  $\text{Ø } 50 \text{ mm}$  outside diameter, and other accessories, without interference. Special models upon request.

## Technical data:

Maximum pressure service @70°F: 6000 psi.



## How to order

**TMP 4 - 6 C**

**Model**

**Main inlet/outlet connection**

- 2 : 1/4" NPT MF
- 4 : 1/2" NPT MF


**Material**

- C: carbon steel
- I: stainless steel. 316 SS

**Side connections quantity**

- 3 : 3 connections 1/4"NPTF
- 6 : 6 connections 1/4"NPTF

## Dimensions

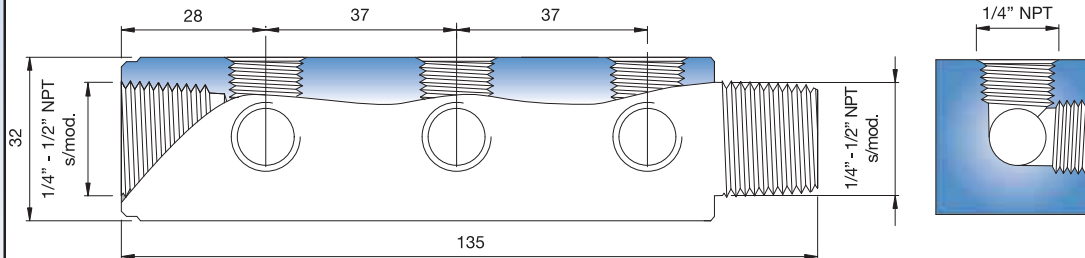

NOTE: 6 connections 1/4" NPT version are shown.  
In the 3 outlets version, the connection of one face are eliminated.